



Author – A.Kishore
<http://appsdba.info>

Install 11g Client on linux

```
[obi@linux4 client]$ ls  
doc install response runInstaller stage welcome.html  
[obi@linux4 client]$ ./runInstaller
```

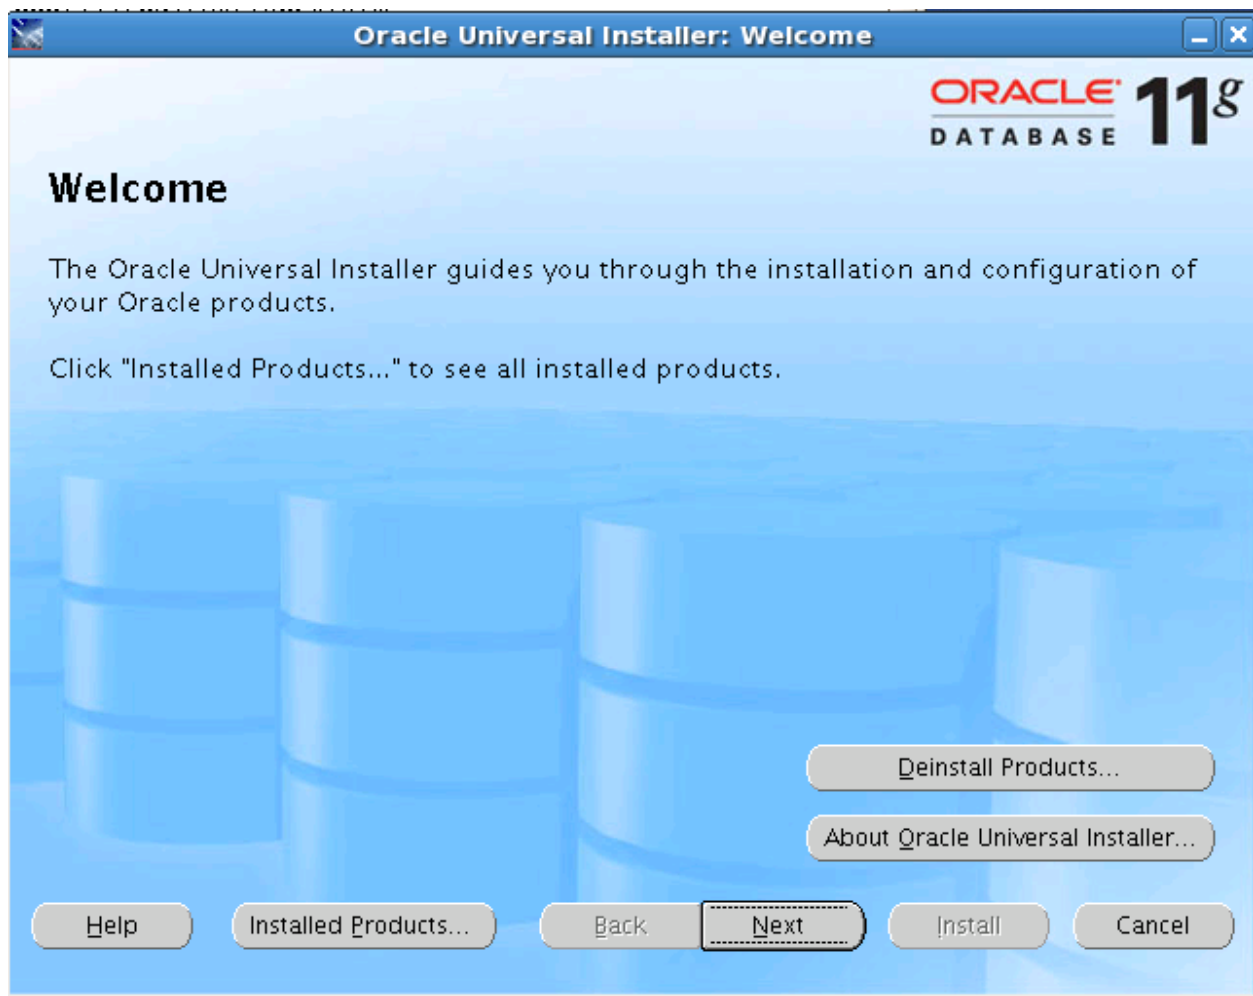

Author – A.Kishore
<http://appsdba.info>

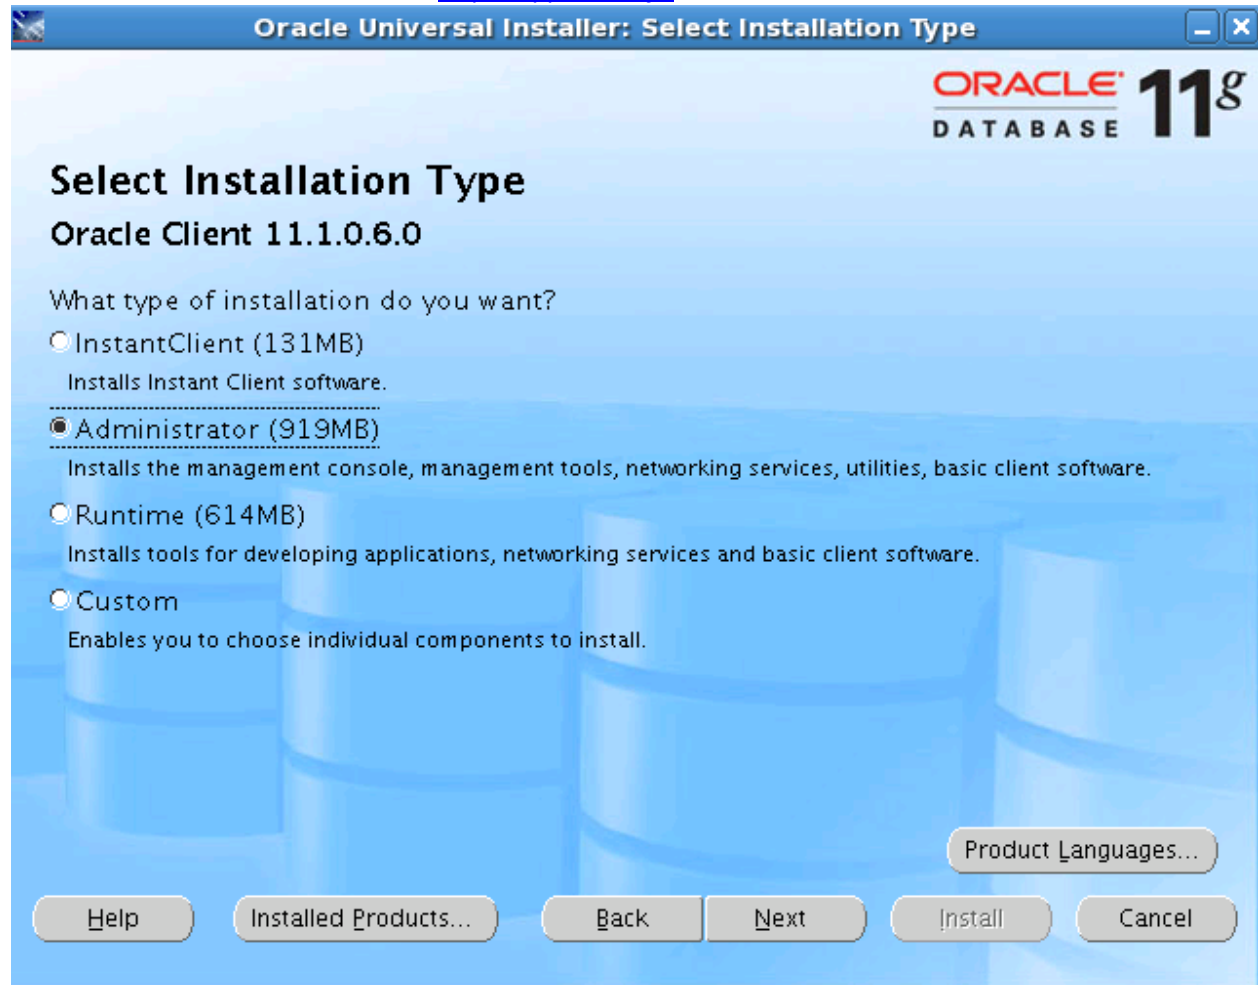

Author – A.Kishore
<http://appsdba.info>

The screenshot shows the 'Oracle Universal Installer: Specify Home Details' window for Oracle Database 11g. The window title bar includes the Oracle logo and '11g DATABASE'. The main heading is 'Install Location'. Below this, there is a paragraph explaining that the specified location is the Oracle Base directory. A text input field for 'Oracle Base' contains the path '/d04/oracle/obiee' and a 'Browse...' button. The next section is 'Software Location', with a paragraph explaining it is the Oracle Home directory. It includes a 'Name' field with 'OraClient11g_home1' and a 'Path' field with '/d04/oracle/obiee/product/11.1.0/client_1', both with 'Browse...' buttons. At the bottom, there are buttons for 'Help', 'Installed Products...', 'Back', 'Next', 'Install', and 'Cancel'.

Oracle Universal Installer: Specify Home Details

ORACLE 11g
DATABASE

Install Location

Specify a base location for storing all Oracle software and configuration-related files. This location is the Oracle Base directory. Create one Oracle Base for each operating system user. By default, software and configuration files are installed by version and database name in the Oracle Base directory

Oracle Base:

Software Location

Specify a base location for storing Oracle software files separate from database configuration files in the Oracle Base directory. This software directory is the Oracle Home directory. Change the defaults below either to specify an alternative location, or to select an existing Oracle Home

Name:

Path:

Author – A.Kishore
<http://appsdba.info>

